


## Modern Welding Company Subsidiaries Nationwide

## HORIZONTAL ABOVEGROUND DUAL WALL STORAGE TANKS

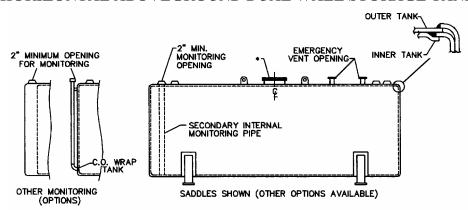

APPROX. CAPACITY		
(GALLONS)	NOM. DIAMETER	NOM. LENGTH
300	38"	6'-0"
560	48"	6'-0"
1,000	64"	6'-0"
2,000	64"	12'-0"
3,000	64"	18'-0"
4,000	64"	24'-0"
4,000	96"	10'-8"
6,000	96"	16'-0"
8,000	96"	21'-4"
10,000	96"	26'-9"
12,000	96"	32'-0"
10,000	120"	17'-0"
12,000	120"	20'-6"
15,000	120"	25'-6"
20,000	120"	34'-6"
25,000	120"	42'-9"
30,000	126"	46'-6"
25,000	126"	38'-10"
40,000	144"	47'-4"
50,000	144"	59'-4"

Tank lengths listed above are based on nominal inner tank dimensions.

Overall tank lengths will vary during actual manufacturing.

## STANDARD SPECIFICATIONS

- Built per Underwriters Laboratories UL 142 standard for double wall design.
- Exclusive free flowing design.
- Modern's standard opening locations and required lifting lugs.
- Exterior coated with one (1) coat of standard shop primer and not blast cleaned.
- Check with Modern for type of Emergency Vent Openings supplied.
- Support may be two (2) saddles, stabilizers, or skid configuration.
- Other exterior and interior coating systems available upon request.
- Other tank sizes available upon request.