




FLAMESHIELD® ABOVEGROUND “FIRE RESISTANT” DOUBLE WALL STORAGE TANKS

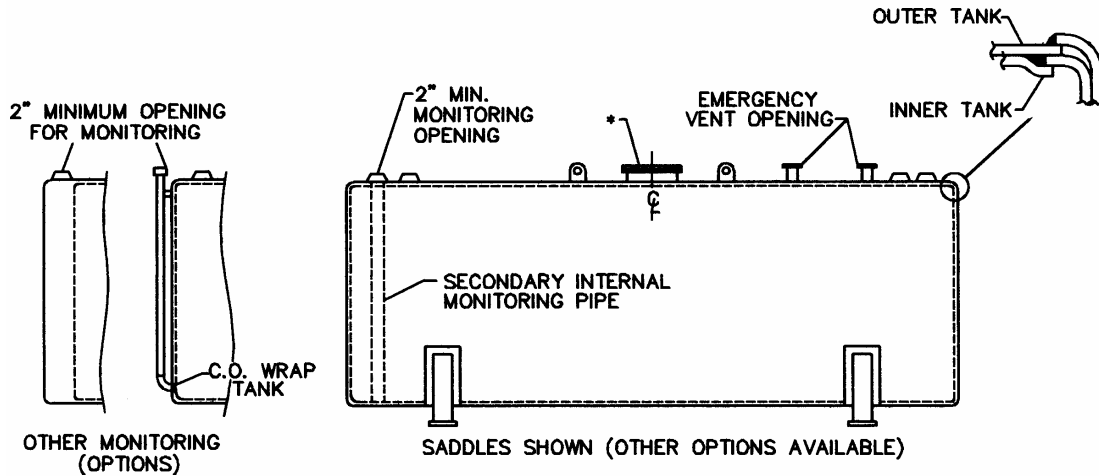

APPROX. CAPACITY (GALLONS)	NOM. DIAMETER	NOM. LENGTH
560	48"	6'-0"
1,000	64"	6'-0"
2,000	64"	12'-0"
3,000	64"	18'-0"
4,000	64"	24'-0"
4,000	96"	10'-8"
6,000	96"	16'-0"
8,000	96"	21'-4"
10,000	96"	26'-9"
12,000	96"	32'-0"
10,000	120"	17'-0"
12,000	120"	20'-6"
15,000	120"	25'-6"
20,000	120"	34'-6"
25,000	120"	42'-9"
30,000	126"	46'-6"
25,000	126"	38'-10"
30,000	144"	36'-0"
50,000	144"	59'-4"

Tank lengths listed above are based on nominal inner tank dimensions.
Overall tank lengths will vary during actual manufacturing.

STANDARD SPECIFICATIONS

- Tank meets UL 142 standards for double wall design.
- Tank bear the SWRI 97-04, Flameshield® label for fire resistant tanks.
- Modern's standard opening locations and required lifting lugs.
- Exterior is blasted and finish coated.
- Exclusive free flowing annular space design.
- Check with Modern for type of Emergency Vent Openings supplied.
- Support may be two (2) saddles, stabilizers, or structural skids.
- Other exterior and interior coating systems available upon request.
- Other tank sizes available upon request.