




**FIREGUARD® ABOVEGROUND “PROTECTED TYPE” DOUBLE WALL STORAGE TANKS**

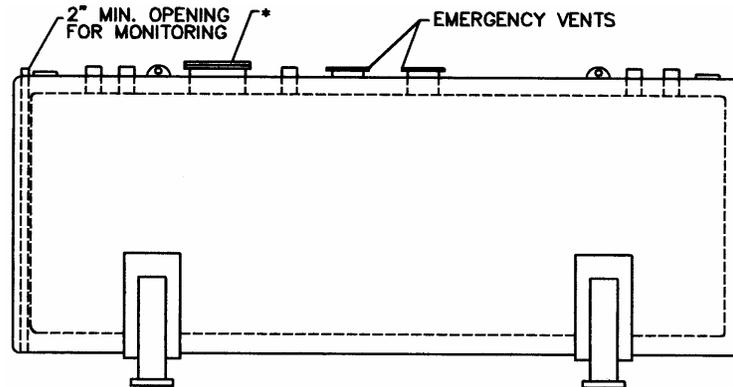

| INNER TANK                |                  |                | OUTER TANK       |                |
|---------------------------|------------------|----------------|------------------|----------------|
| APPROX. CAP.<br>(GALLONS) | NOM.<br>DIAMETER | NOM.<br>LENGTH | NOM.<br>DIAMETER | NOM.<br>LENGTH |
| 186                       | 36"              | 3'-6"          | 48"              | 4'-6"          |
| 300                       | 38"              | 5'-0"          | 50"              | 6'-0"          |
| 560                       | 48"              | 6'-0"          | 54"              | 6'-6"          |
| 1,000                     | 64"              | 6'-0"          | 70"              | 6'-6"          |
| 1,500                     | 64"              | 9'-0"          | 70"              | 9'-6"          |
| 2,000                     | 64"              | 12'-0"         | 70"              | 12'-6"         |
| 2,500                     | 64"              | 15'-0"         | 70"              | 15'-6"         |
| 3,000                     | 64"              | 18'-0"         | 70"              | 18'-6"         |
| 4,000                     | 84"              | 14'-0"         | 90"              | 14'-6"         |
| 5,000                     | 96"              | 13'-6"         | 102"             | 14'-0"         |
| 6,000                     | 90"              | 18'-2"         | 96"              | 18'-8"         |
| 6,000                     | 96"              | 16'-0"         | 102"             | 16'-6"         |
| 8,000                     | 96"              | 21'-0"         | 102"             | 21'-6"         |
| 10,000                    | 96"              | 26'-10"        | 102"             | 27'-6"         |
| 12,000                    | 96"              | 32'-0"         | 102"             | 32'-6"         |
| 15,000                    | 120"             | 25'-6"         | 126"             | 26'-0"         |
| 20,000                    | 120"             | 34'-0"         | 126"             | 34'-6"         |
| 25,000                    | 120"             | 42'-6"         | 126"             | 43'-0"         |
| 30,000                    | 120"             | 51'-0"         | 126"             | 51'-6"         |

Tank lengths listed above are based on nominal tank dimensions.  
Overall tank lengths will vary during actual manufacturing.

**STANDARD SPECIFICATIONS**

- Built to the UL 2085 and STI FIREGUARD® standards.
- Tanks will bear UL 2085 label for "Insulated Secondary Containment for Flammable Liquids-Protected Type".
- Inner and outer tank construction and thickness per UL 142.
- Modern's standard opening locations and required lifting lugs.
- Annular space monitoring capabilities
- Support saddles.
- Exterior blasted and finish coated white to Fireguard requirements.
- Check with Modern for type of Emergency Vent Opening supplied.
- Other exterior and interior coating systems may be available upon request.
- Other tank sizes available upon request.