




STI F921 VERTICAL ABOVEGROUND DOUBLE WALL STORAGE TANKS

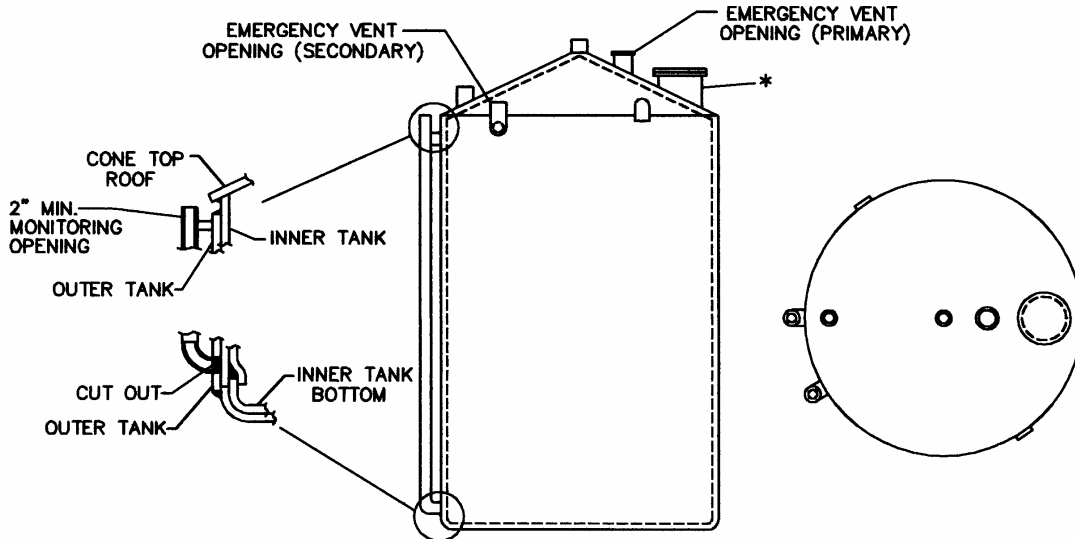

APPROX. CAPACITY (GALLONS)	NOM. DIAMETER	NOM. HEIGHT
560	48"	6'-0"
1,000	64"	6'-0"
2,000	64"	12'-0"
3,000	84"	10'-6"
3,000	96"	8'-0"
4,000	96"	10'-8"
6,000	96"	16'-0"
6,000	120"	10'-3"
8,000	120"	13'-8"
10,000	120"	17'-0"
12,000	120"	20'-6"
16,500	120"	28'-0"
15,000	126"	23'-2"
15,000	144"	17'-9"
20,000	144"	23'-8"
24,000	144"	29'-0"
29,600	144"	35'-0"

Tank lengths listed above are based on nominal inner tank dimensions.
Overall tank lengths will vary during actual manufacturing.

STANDARD SPECIFICATIONS

- Tank meets UL142 and F921 standards for double wall design.
- Tanks bear the UL and F921 label for secondary containment.
- Modern's standard opening locations and required lifting lugs.
- Exclusive free flow annular space design.
- Exterior coated with one (1) coat of standard shop primer and not blast cleaned.
- Check with Modern for type of Emergency Vent Opening supplied.
- Other exterior and interior coating systems available upon request.
- Other tank sizes available upon request.